
DETAIL #8

METHOD OF DEPRESSING CURBS

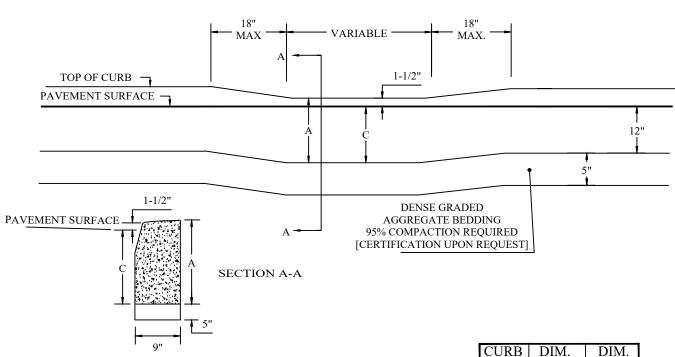

NOTE:

- 1. PREFORMED BITUMINOUS CELLULAR TYPE EXPANSION JOINT FILLER (AASHTO M33) 1/2" WIDE IN THE CURB SHALL BE PROVIDED AT APPROXIMATELY EQUAL DISTANCES OF NOT MORE THAN 20' BETWEEN JOINTS, AND SHALL BE FLUSH WITH THE TOP AND FACE OF CURB.
- 2. IN LIEU OF DENSE GRADED (DGA), RECYCLED CONCRETE AGGREGATE (RCA) IS ACCEPTABLE. ALL RCA MUST MEET NJDOT SPECIFICATIONS AND BE CERTIFIED BY AN NJDOT APPROVED PLANT OF ORIGIN. ALL RCA SHIPMENTS MUST BE FREE OF FOREIGN MATERIALS AND CONTAMINENTS.
- 3. 9"x 16" CURB SIZE IS PREFERRED.

Ronald M. Sendner D Licensed Professional Engineer License No. 24GE03162200

CURB SIZE	DIM. "A"	DIM. "C"
9"x 16"	16"	14½"
9"x 18"	18"	16½"
9"x 20"	20"	18½"

			_		
	Revisions		MIDD	IECEV	
NO.	DAT	E BY			
1	1/16/	19 KP			
2	8/5/2	2 VD	C O U N T Y + N J		
			Department of Transportation • Office	of Engineering / Planning / Public Works	
			75 Bayard St., New Brunswick, NJ 08901		
			-		
			1		
			DEPRESSED CURB DETAIL		
-					
L.	L.,				
<u> </u>	gned By	Drawn By	Scale: Not to Scale	Danald M. Candnar	
RS		EHC	Sheet No. 1 of 1	<u>Ronald M. Sendner</u>	
_	cked By	Approved B	Date: 4/25/17	County Engineer	
	RS	RS	Date. 4/23/1/	N.J. P.E. No. 24GE03162200	